

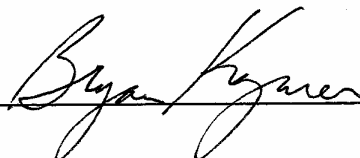
LABORATORY TEST REPORT

COMPOUND: VNC70-301
COLOR: N/A
SPECIFICATION: GENERAL

Page 1 of 1

DATA REPRESENTS ACTUAL LABORATORY TESTS

<u>Test Method</u>	<u>Results</u>
Durometer, Shore A, 15 second delay ISO 868 / ASTM D2240	70
Specific Gravity, max., ISO 1183 / ASTM D792	1.32
Tensile Strength, MPa min. ISO R527-5A / ASTM D638	11.9 MPa
Ultimate Elongation, % min., ISO R527-5A / ASTM D638	292%
Tear Strength, kN/m min. ISO 34 / ASTM D1004	37.8 kN/m
Flammability, Burn rate in mm/min. FMVSS 302	Self-Extinguishing
Compression Set, Type A 24 hrs. @ 70°C, ISO 815	69.5%

Approved by: 

* Test is outside our scope of accreditation.

** This test was performed by a subcontracted accredited testing laboratory.

*** This test was performed at supplier's biological laboratory.

O:\2013\545_VNC70-301_General.doc

All tests are performed once.

This report is not to be reproduced except in full.